


Gripple

Gripple No.3 tree guying kit (driven fixing)

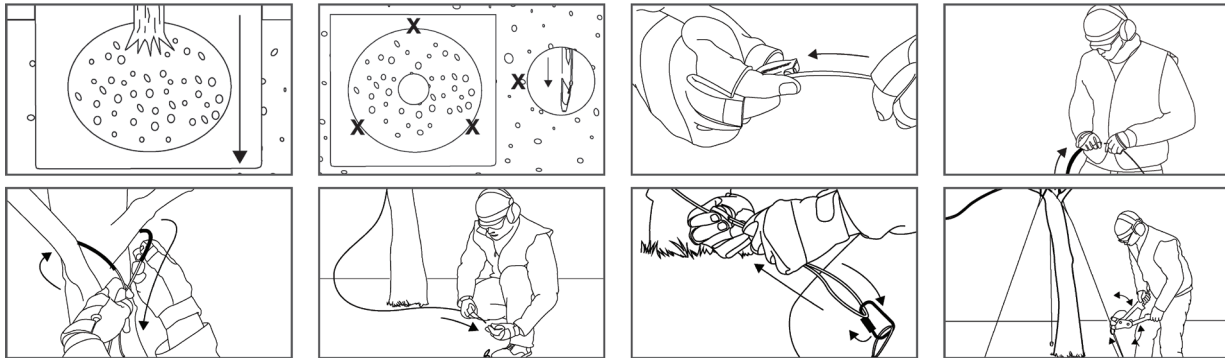

- Tension each of the guys as required using the Torq Tool until the tree is vertical.

Tree guying kit Component Specifications

Component	Quantity	Material Composition	Dimensions	Working Load
Gripple TL-A3 Ground Anchor	3	Die Cast Zinc-Aluminum Alloy ZA-2 (EN 12844)	Width: 42mm Length: 119mm Surface Area: 3870mm ²	1000kg
Gripple Plus Medium Two Way Tensioning Device	6	Housing- Die Cast Zinc-Aluminum Alloy ZA-2 (EN 12844) Spring- Spring Steel (BS 2056)	Height: 26.3mm Length: 39.3mm Width: 11mm	400kg
Gripple Wire Rope c/w Quick Link	3	Zinc-Aluminum Coated Steel (EN 10244 Class B)	Ø: 3mm Length: 1m 1 x19 Wire Strand Construction	800kg
Gripple Wire Rope	3	Zinc-Aluminum Coated Steel (EN 10244 Class B)	Ø: 3mm Length: 4.5m 1 x19 Wire Strand Construction	800kg

Accessories

Product code	Description
LNC6490	Gripple No.3 & 4 tree anchor installation tool (driven fixing) - 1.2m

