


LuxR

Modux One Spike Spot with Glare Guard - s/steel

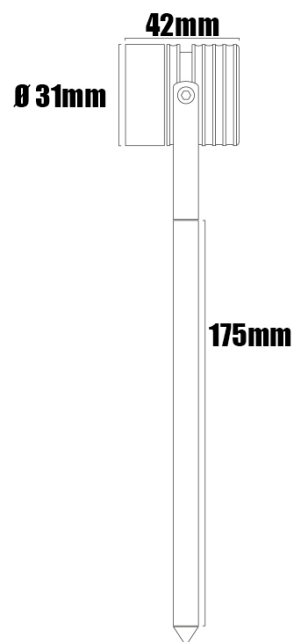

COLOUR	PRODUCT CODE	BEAM ANGLE	WATTAGE	LIFE OF LAMP	LUMENS
W/WHITE	LUX1025	15°	1W	5000h	N/W 85LM
W/WHITE	LUX1024	20°	1W	5000h	W/W 85LM

GENERAL

Construction Material	Marine grade 316 stainless steel
Cut-out (mm)	N/A
IP rating	68
Rotation angle (°)	N/A
Tilt angle (°)	N/A
Weight (g)	N/A

Wiring

Cable/flying lead	0.5m - (HO5RN-F) rubberised cable (outside diameter: 6.5mm)
Type of wiring required	Series

Power Supplies

Product code	Description
LGT2220	350mA Non-dimming
LGT2320	350mA Dimming

Accessories

Product code	Description
ELA7924	Flexible conduit 20mm (16mm ID) black - 50mm
ELC1022	Black rubber cable 2-core - 1mm - 50m

Warranty

7 year extended warranty available