


Oase

ProfiClear Guard (PNF6492)

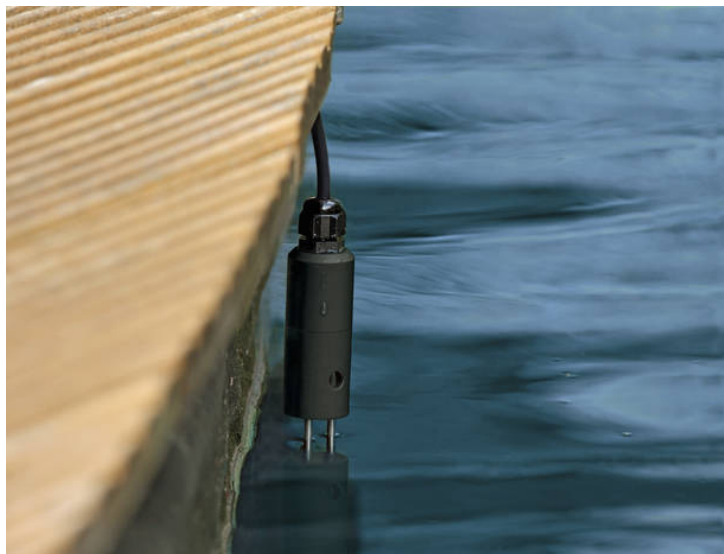

ProfiClear Guard

Dimensions (L x W x H)	mm	120 x 55 x 111
Rated voltage		230 V / 50 Hz
Rated voltage - sensor	V	12
Power consumption	W	3
Net weight	kg	2.82
Power cable length	m	2
Cable length, sensor	m	20
Cable length of the valve	m	3
Connection	mm	13
Connection		½"
Max. operating pressure	bar	18
Switching differential	mm	25
Guarantee	Years	2

- Complete set consisting of control system, ½" solenoid valve and conductive level detection
- Sensor can be shortened to 10 mm switching differential
- Sensor sensitivity is adjustable
- Integrate switching hysteresis to prevent undesired replenishment through waves
- LED status display for the solenoid valve
- The control system can be mounted on a wall
- Including sensor fastening element for projecting pond edges
- Servo-controlled 230 V brass solenoid valve (splashproof installation required)

