


LuxR

M1 LED Halo pole light - s/steel - 1w - 12v (350mA)

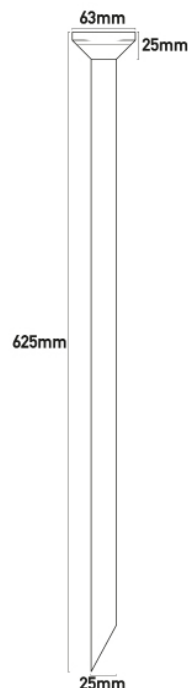

COLOUR	PRODUCT CODE	BEAM ANGLE	WATTAGE	LIFE OF LED	LUMENS
WW/3000K	LUX3032	N/A	1W	60,000h	70lm

GENERAL

Construction Material	316 Marine-grade stainless steel
Cut-out (mm)	N/A
IP rating	68
Rotation angle (°)	N/A
Tilt angle (°)	N/A
Weight (g)	N/A

Wiring

Cable/flying lead	1m - HO5RN-F rubberised cable
Type of wiring required	Series

Power Supplies

Product code	Description
LGT2220	350mA Non-dimming
LGT2320	350mA Dimming

Accessories

Product code	Description	Product code	Description
ELA7924	Flexible conduit 20mm black - 50mm	ELA8620	Connection box for standard & high power LED lights
ELC1022	Black rubber cable 2-core - 1mm - 50m	ELA9510	Wiska gel sachet - 2 x 85ml

Warranty

Body	Internal
10 year	5 year