


LANDSCAPEPLUS

350, 700 and 1050mA Constant Current LED Power Supply

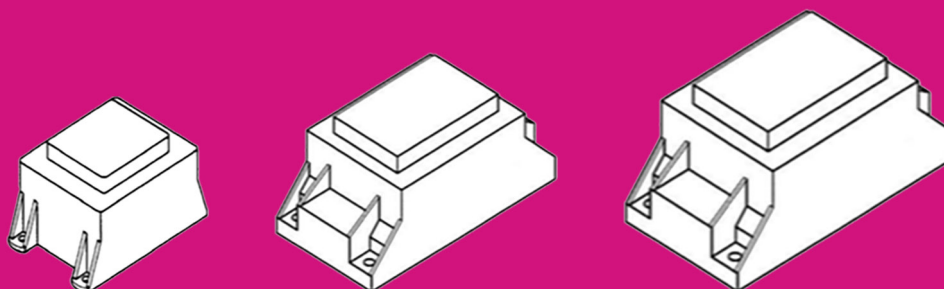

Dimensions, Fixing Centres and Weight

LGT	2220	2432	2240
Rating	350mA	700mA	1050mA
Width (mm)	100	124	130
Depth (mm)	68	71	85
Height (mm)	68	64	75
Fixing centres (mm)	90 x 57.5	105 x 57.5	115 x 70
Fixing holes (mm)	4 x M4	4 x M4	4 x M6
Weight (kg)	1.1	1.3	2.4

Specifications

The 350, 700 and 1050mA power supplies supplied by Landscapeplus have been specifically designed to comply with the 17th Edition IEE regulations 2008 (BS 7671) and all subsequent amendments.

Installation

The power supplies are suitable for floor standing, wall mounting or siting underground, they are supplied with non-replaceable 1 metre leads. They should be installed by a qualified electrician in accordance with current regulations.

IP Rating

The power supplies have an IP67 rating as supplied, it is the responsibility of the installer to ensure any joints or modifications maintain this rating.

Operating Range

The power supplies are suitable for use in an ambient temperature range from -10 to +60°C.

Protection

The output of the 350 and 700mA power supplies are protected by a current and temperature sensitive thermistor. The input is protected from overload by a current and temperature sensitive trip. Either trip can be reset by turning off the mains for 30 minutes; if the trip operates then the installation wiring should be checked for faults.

Case and Resin

The case is glass filled nylon 66, which has a flammability rating of UL94 HB, and the power supply is moulded in a UL94 V0 polyurethane resin.