


Gripple

No.3 tree anchoring kit (driven fixing)

Root Ball Kit

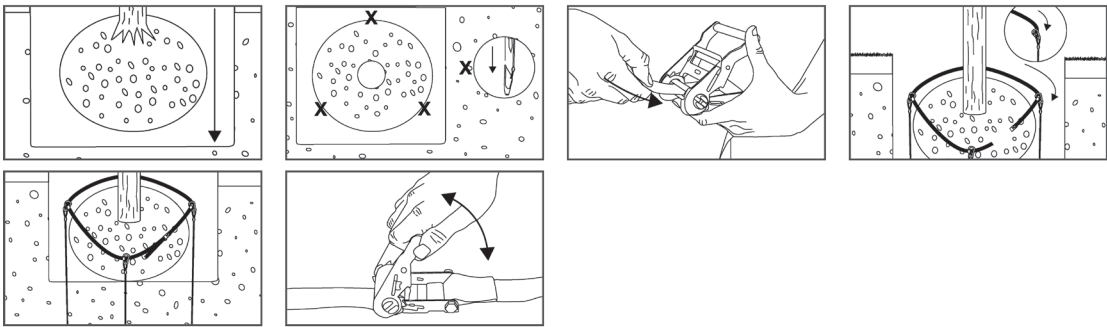

- Always lift the tree by the root ball and never the trunk.
- Ensure the hole is deep enough for root flare to be slightly higher than the surface grade.

Rootball Kit 3 Component Specifications

Component	Quantity	Material Composition	Dimensions	Working Load
Gripple TL-A3	3	Die Cast Zinc-Aluminum Alloy ZA-2 (EN 12844)	Width: 41mm Length: 119mm Surface Area: 3870mm ²	Up to 1000kg
Gripple Wire Rope c/w Quick Link	3	Zinc-Aluminum Coated Steel (EN 10244 Class B)	Ø: 3mm Length: 1m 1x19 Wire Strand Construction	800kg
Gripple Ratchet and Strap	1	Polyester Webbing with Yellow Passivated Steel Ratchet	Length: 3m Width: 40mm Thickness: 3mm (Webbing)	1500kg

Accessories

Product code	Description
LNC6490	Gripple No.3 & 4 tree anchor installation tool (driven fixing) - 1.2m

