


Gripple

No.4 tree anchoring kit (driven fixing)

Root Ball Kit

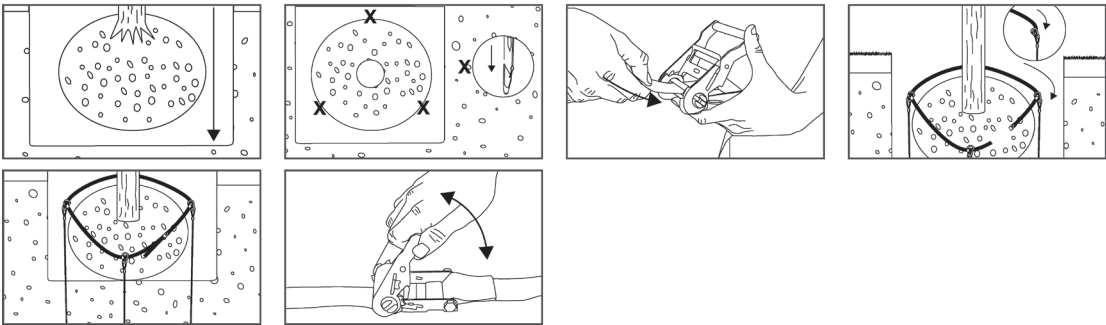

- 
- Always lift the tree by the root ball and never the trunk.
 - Ensure the hole is deep enough for root flare to be slightly higher than the surface grade.

Rootball Kit 4 Component Specifications

Component	Quantity	Material Composition	Dimensions	Working Load
Gripple TL-A4	3	Die Cast Zinc-Aluminum Alloy ZA-3 (EN 12844)	Width: 62mm Length: 170mm Surface Area: 7740mm ²	Up to 1500kg
Gripple Wire Rope c/w Quick Link	3	Zinc-Aluminum Coated Steel (EN 10244 Class B)	Ø: 4mm Length: 1m 1x19 Wire Strand Construction	1200kg
Gripple Ratchet and Strap	1	Polyester Webbing with Yellow Passivated Steel Ratchet	Length: 5m Width: 50mm Thickness: 3mm (Webbing)	1500kg

Accessories

Product code	Description
LNC6490	Gripple No.3 & 4 tree anchor installation tool (driven fixing) - 1.2m

