

Hunter Roam Remote **ROAM**



Residential/Light Commercial
Remote Control System

Owner's Manual and Installation Instructions
For use with Hunter Controllers with SmartPort® Connection





Hunter®

INTRODUCTION

Finally, there's no need to walk back to the controller to start and stop a manual watering cycle when doing maintenance or repair work on your irrigation system. Finally, winterization can be done quickly and easily with one worker instead of two. Finally no more going back to the garage to start or stop a manual irrigation cycle.

Hunter is pleased to introduce the ROAM Remote Control System for use with Hunter controllers with SmartPort® connection. The ROAM can offer you features other remotes can't, at a price you can afford.

The ROAM transmitter is made of sturdy ABS. It features a large LCD and simple push button operation. Don't let its size fool you-while it's small enough to fit in your shirt pocket, it has an open field range of up to 1000' (305 m).

The large LCD display and simple four-button control make the ROAM a snap to use. Simply press the  or  keys to display the station or program you want to turn on or off, then press the  or  button-what could be easier? Don't worry about forgetting to turn off the ROAM.


After several minutes of inactivity the unit turns itself off to extend battery life. Then, the unit can be turned back on by touching any button. Four AAA alkaline batteries will last an entire season for a contractor, and years for a homeowner.

We believe the ROAM is the simplest remote control available. It is so easy to use that you will need this booklet very little after installation. If you do have a question, keep this in a safe place for easy reference.


Congratulations-your life just got a little easier!

Hunter Roam Remote


ROAM COMPONENTS

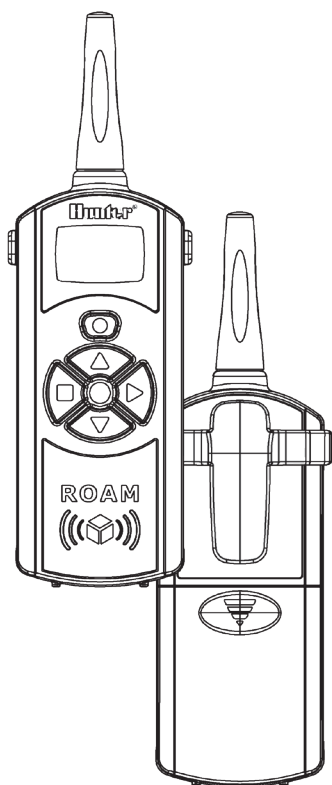

TRANSMITTER

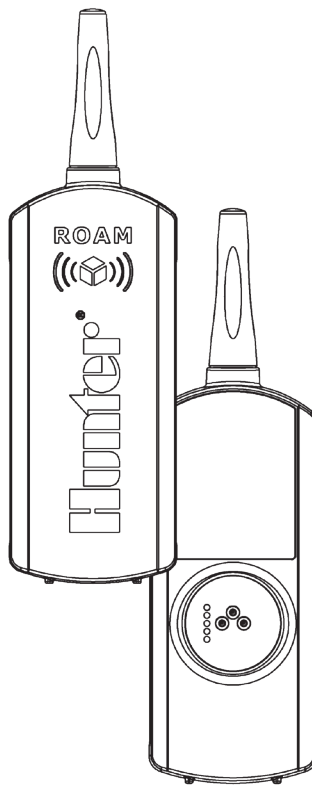

RECEIVER

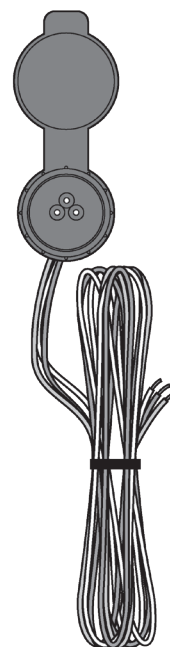

SmartPort®

2

ROAM COMPONENTS (CONTINUED)

This section will give you a brief description of the components of the ROAM. Each item will be discussed in further detail later, however this section can be helpful in getting acquainted with the Transmitter, Receiver, and SmartPort®.

TRANSMITTER

A. LCD Display

1. **Run Time** - Indicates the station run time is being set.
2. **Transmit** - Indicates that the transmitter is transmitting the programmed data to the receiver.
3. **Station Number** - Indicates station number (1 to 240).
On - Indicates Transmitter is turning on a particular station.
Off - Indicates Transmitter is turning off a particular station.
PA, PB, PC - Indicates program selected.
4. **Address** - Indicates that a new address for transmitting between the

Transmitter and the Receiver is being set.

B. Control Buttons

5. - Increases the selected functions.
6. - Decreases the selected functions.
7. - Selects the selected functions.
8. - Cancels the selected functions.
9. - Scrolls between functions.

C. Other

10. **Battery Cover** - Covers compartment for four AAA alkaline batteries.

3

Hunter Roam Remote

ROAM COMPONENTS (CONTINUED)

RECEIVER

- 11. **SmartPort® Outlet (Male)** - Outlet on back of Receiver that plugs into the SmartPort® harness.
- 12. **Antenna** - Receives signals from Transmitter from up to 1000' (305 m).

SmartPort®


- 13. **SmartPort® Outlet (Female)** - Outlet on front of SmartPort® that plugs into the ROAM Receiver or other Hunter product.
- 14. **Rubber Cover** - Protects SmartPort® from dirt and weather.
- 15. **Control Wires** - Red, white, and blue wires that connect to the terminal strip area of the controller.

WIRING HARNESS/SMARTPORT® CONNECTION KIT

4

To utilize the ROAM Remote Control System, your controller must be equipped with the SmartPort® wiring/harness connection kit. This wiring harness provides the connection port where the ROAM receiver is attached.

The SmartPort® wiring harness is included with the purchase of the ROAM. Additional SmartPorts may be purchased separately to allow you to utilize the transmitter and receiver with additional Hunter controllers.

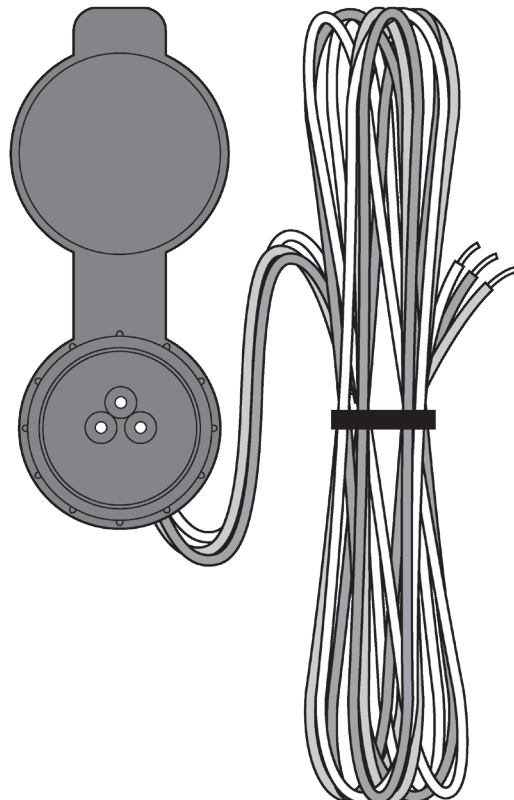

Hunter Roam Remote

INSTALLING THE ROAM REMOTE WIRING HARNESS



NOTE: Any extension of the wires provided with the standard wiring harness may result in an error message on the controller display and possible malfunction of the remote due to radio interference. In some situations, lengthening of the standard harness may work fine, in others it may not work at all (it is site specific). In either case, it is recommended that installations where the SmartPort® outlet will be located more than 5 ft (1.5 m) from the controller that the installation be done using the shielded cable wiring harness (ROAM-SCWH) to minimize the possible effects of electrical noise.



NOTE: While the SmartPort® has a protective cover to allow for outdoor installation, the ROAM Receiver should only be used on a temporary basis, as the Receiver is not designated for permanent outdoor mounting.

1. Install a 1/2" female threaded "Tee" in the field wiring conduit approximately 12" (30 cm) from the controller.
2. Feed the red, white, and blue wires of the SmartPort® through the base of the "Tee" and into the controller wiring compartment as shown in Figure 1.

3. Screw the SmartPort® housing into the "Tee" (or other fitting) as shown in Figure 1.
4. Route wiring harness into controller housing. Attach the red wire to the first **AC** screw slot. Attach the white wire to the other **AC** screw slot, and attach the blue wire to the **R** (or **REM** on some controllers) as shown in Figure 2.





Figure 1 Pre-assembled Assembled

6

WIRING THE SMARTPORT® TO HUNTER CONTROLLERS

SRC Controller SmartPort® Installation

Access the terminal strip area and attach the red wire to the left **AC** screw slot, attach the white wire to the next **AC** screw slot and attach the blue wire to the screw slot marked **R**.

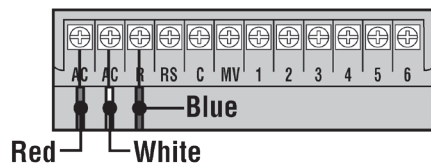



slot, attach the white wire to the upper **AC** screw slot and attach the blue wire to the screw slot marked **REM**.

ICC Controller SmartPort® Installation

Access the terminal strip area on the power module and attach the red wire to the bottom most **AC** screw slot, attach the white wire to the upper **AC** screw slot and attach the blue wire to the screw slot marked **REM**.

Pro-C Controller SmartPort® Installation

Access the terminal strip area on the main module and attach the red wire to the bottom most **AC** screw

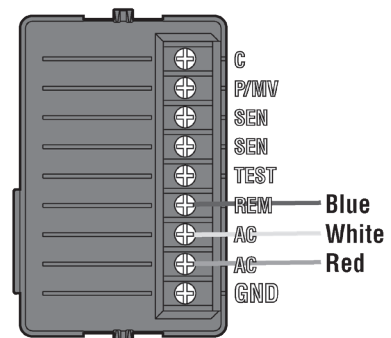

Hunter Roam Remote


TYPICAL INSTALLATION

Receiver Mounted Indoors

This installation is ideal for situations when the ROAM system will be left permanently connected to the controller in an indoor area.

Connection of Receiver on a Temporary Basis from Outside of a Garage or Building

This installation is ideal for situations where a contractor desires the ability to access and operate a controller from outside of a locked building or garage. However, the ROAM receiver must be removed from the SmartPort® and the weather resistant cap placed back on the outlet after each use.

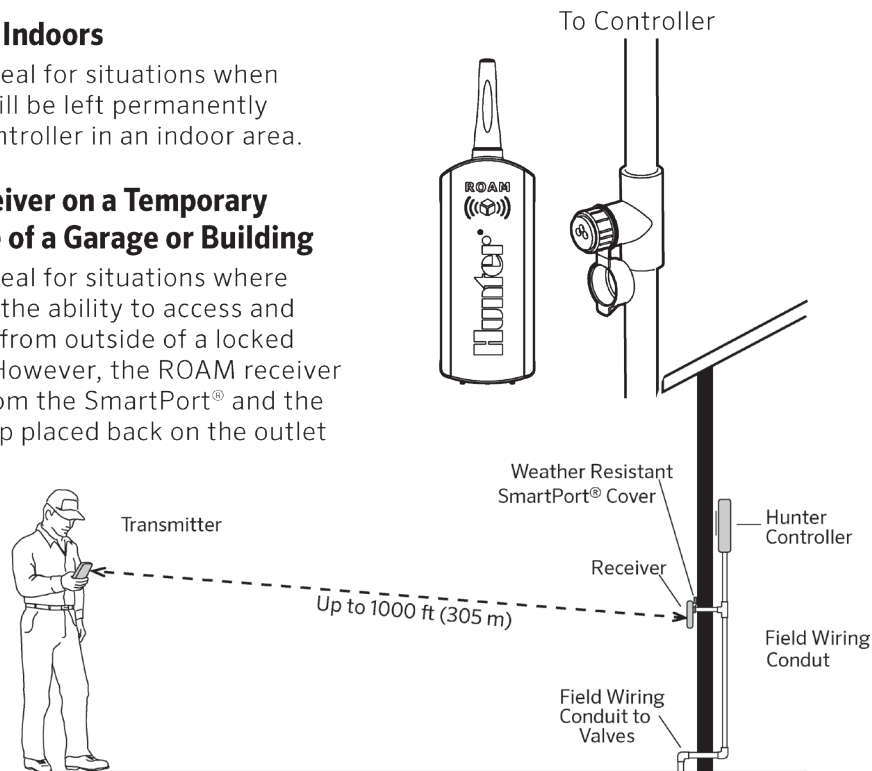

8

MAXIMIZING OPERATING RANGE

There are many factors which influence operating range. Listed below are a few things you can do to assure that you get maximum range possible.

1. Do not install SmartPort® near large sources of metal such as power meters, water pipes, and aluminum siding.
2. Do not install SmartPort® in a basement or underground location. The higher the location the better chance of strong reception.
3. For maximum range in all directions, the receiver should be pointed straight up (vertically). If receiver is mounted with its antenna oriented horizontally, reception will be very good if transmitter is on either side of the antenna, but very poor if it is facing either end of the receiver antenna.
4. When operating transmitter, hold the transmitter as vertical as possible and face in the direction of the receiver, especially if it is several hundred meters away.





NOTE: Remote is designed for residential and small commercial sites. Large projects such as cemeteries and golf courses will require a long-range remote.

Hunter Roam Remote

EXTENDING WIRING ON SMARTPORT® HARNESS

Use shielded cable to connect the SmartPort® to the controller if installing the connector more than 2 meters of wiring length from the controller. The use of shielded cable will eliminate the potential for radio interference by preventing the wire as acting as an antenna. At no time should the SmartPort® be installed more than 15 meters away from the controller.


For easiest installation, order a Hunter **ROAM-SCWH** SmartPort® wiring harness with a full 7.6 meters of shielded cable.

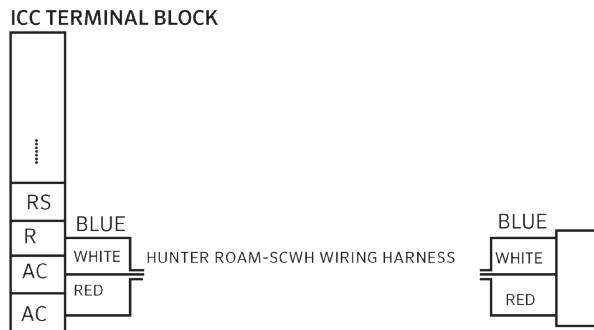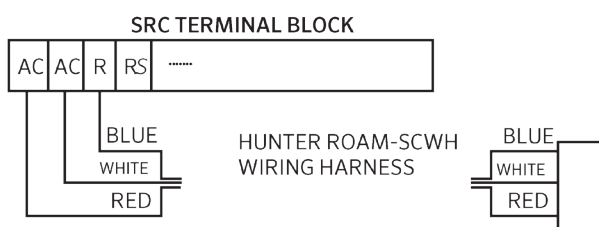

PREPARING THE TRANSMITTER FOR USE

10


Your ROAM System is designed to work right out of the box. This means that other than installing the batteries, you may choose to skip this entire section. However, we recommend you read it because with a few simple steps you can customize your ROAM to add functionality and security to your system.

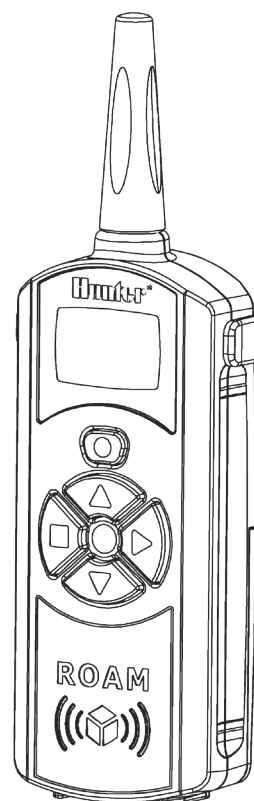

Hunter Roam Remote

INSTALLING THE TRANSMITTER BATTERY

Your ROAM Transmitter requires four AAA alkaline batteries. To install the batteries, slide open the battery door on the back of the transmitter. When changing the batteries, make sure that they are oriented properly in the battery holder. Slide the battery door shut.

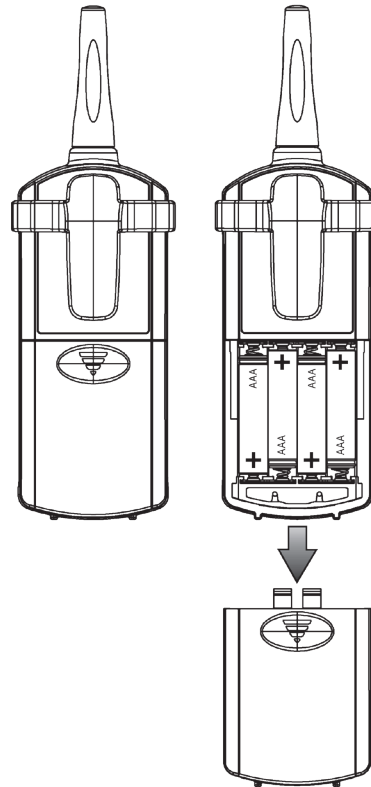






12

CHANGING THE REMOTE ACTIVATED STATION RUN TIME

You have the ability to adjust the amount of time that a station will run once it has been turned on by your ROAM System. This does not affect the run time programmed into your controller. There are 10 preset run times from 1 minute to 90 minutes.

To change the Remote Activated Station Run Time follow the steps below:

1. If the unit is off (no display), power the transmitter up by pressing and holding the Mode button  for 5 seconds. The transmitter will first display the active station.
2. Press the Mode button  once and the Run Time icon  displayed (default is 2 minutes). If more than 10 seconds go by without a button being pressed, the Transmitter will revert back to displaying the active station.
3. Use the  and  buttons to change the Run Time to any of the 10 settings ranging from 1 to 90 minutes. Then do not touch any of the buttons for 10 seconds and the display will return back to the active station.






Hunter Roam Remote

CHANGING THE TRANSMITTER ADDRESS

Both the ROAM Transmitter and Receiver have an “address” that they use when communicating. If the addresses do not match, the receiver will ignore the transmission.

Your ROAM comes from the factory with both the Transmitter and the Receiver address set to 1. You may change the address to any value from 0 through 127 for added security. Note that if you change the Transmitter address, the Receiver must “learn” the new address as described in “Preparing the Receiver for Use” section.



To change the Transmitter address follow the steps below:

1. If the unit is off (no display), power the Transmitter up by pressing and holding the Mode button  for 5 seconds. The Transmitter will display the active station.
2. Press the Mode button until the Address Key icon is displayed.
3. Use the  and  buttons to change the address to any value between 0 and 127. Then do not touch any of the buttons for 10 seconds and the display will return back to the active station.







CHANGING THE MAXIMUM STATION NUMBER

14

Your ROAM Transmitter comes from the factory with the maximum station number set to 15. This means that when you use the  and  buttons to change the station, you may change it to any number between 1 and 240. However, if you only have a 6-station controller, you will never need to access stations 7 through 9. Likewise, perhaps you will own a Hunter controller like the ICC which can have more than 9 stations. In this case you would want to access the stations above 9.

Caution: If MAX station is set to 240, ROAM will only work with the ACC controller. If you are using an SRC, Pro-C, or ICC controller, make sure your station count is set to 1 - 48.

The ROAM Transmitter allows you to set the maximum station number as follows:

1. If the unit is off (no display), power the transmitter up by pressing and holding the Mode button  for 5 seconds. The Transmitter will display the active station.
2. Press the Mode button until the Station Number icon is  displayed.
3. Use the  and  buttons to change the maximum station number from 1 to 240. Then, do not press any buttons for 10 seconds and the display will return to the active station number.
4. You may now change the active setting to any station in the new station range.


Hunter Roam Remote

PREPARING THE RECEIVER FOR USE

As stated earlier, your ROAM System is designed to work right out of the box. If you have decided to change your Transmitter address as described in the previous section, you must allow the Receiver to “learn” this new address. Once learned, the only way to remove the address from Receiver memory is to learn a different address. This can be done by following the simple steps outlined below.





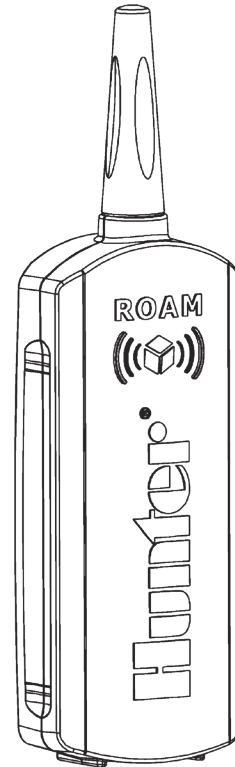

NOTE: The ROAM remote receiver should not be permanently installed in an outdoor or unsheltered location.



16


CHANGING THE RECEIVER ADDRESS


1. Before setting the receiver address, make sure that the transmitter address is set to the address you would like to use.
2. Plug the receiver into a SmartPort® connected to a powered controller. When this is done, the receiver will beep 4 times.
3. Once the receiver beeps 4 times, you have approximately 10 seconds to send the new address to the receiver. Press either the  or  button on your transmitter to connect.
4. The receiver will beep 4 additional times indicating that it has learned the new transmitter address and will respond only to that address from this point on. If 10 seconds expire before the  or  button is pressed, the receiver will beep once and retain its original address.

Hunter Roam Remote

ACTIVATING A STATION WITH THE ROAM REMOTE CONTROL SYSTEM

The ROAM System will allow you to remotely turn on and off any station on your Hunter controller with the press of a button. Once on, the station will run for the run time you have designated in the remote. To remotely activate a station or program follow the steps below:

1. Plug the receiver into a SmartPort® that is connected to a powered controller. The receiver will beep 4 times followed by a 10-second pause and a single beep.
2. If your transmitter is not on (no display), wake it up by pressing and holding the MODE button  for 5 seconds. The Transmitter will display the active station.
3. Use the  and  buttons to display the station or program you would like to start.
4. Press the  button to start the station or program. The Transmitter will display the Transmit icon . If you are near the receiver, you will hear it beep 2 times. This indicates that the Receiver has received the command.
5. Press the  button to turn off any station

that is on. The display will show the Transmit icon  and receiver will beep again twice. The ROAM System is designed to turn on one station at a time (unless you activate a program). Therefore, turning a station on while another station is operating will cause the operating station to turn off.



NOTE: The ROAM remote can activate any station on the controller whether the controller dial is in the “SYSTEM OFF”, “RUN” or “RUN/BYPASS SENSOR” modes. If a sensor device has been wired to the controller, the ROAM remote will NOT override the sensor for manual operation.

