


Aquarius Universal Premium

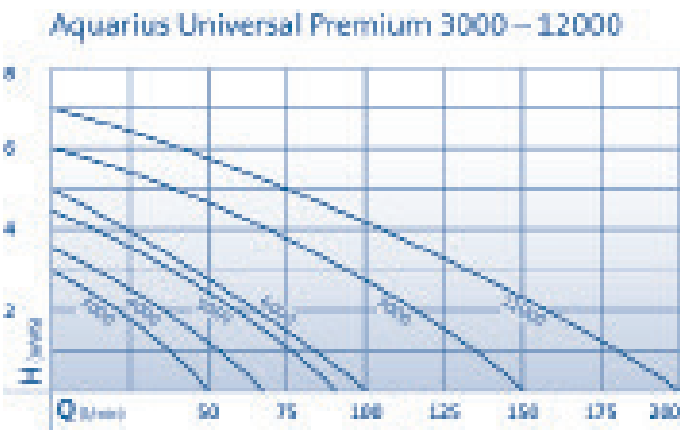

- | | | Aquarius
Universal
Premium
Eco 3000 | Aquarius
Universal
Premium
Eco 4000 | Aquarius
Universal
Premium
4000 | Aquarius
Universal
Premium
5000 | Aquarius
Universal
Premium
6000 | Aquarius
Universal
Premium
9000 | Aquarius
Universal
Premium
12000 |
|---------------------------------------|-------|--|--|--|--|--|--|---|
| Dimensions (L x W x H) | mm | 246 x 130 x 134 | | | 315 x 140 x 130 | | 337 x 161 x 158 | |
| Rated voltage | | 220 - 240V/50 Hz | | | | | | |
| Power consumption | W | 40 | 50 | 65 | 85 | 110 | 195 | 270 |
| Power cable length | m | 10.00 | | | | | | |
| Net weight | kg | 3.00 | | 3.40 | | 3.50 | 5.40 | 5.45 |
| Guarantee (+ request guarantee)*P.293 | Years | 3 + 2 | | | | | | |
| Max. flow rate | l/min | 50 | 67 | | 83 | 100 | 150 | 200 |
| Max. flow rate | l/h | 3000 | 4000 | | 5000 | 6000 | 9000 | 12000 |
| Max. head height | m | 3.20 | 3.40 | | 4.50 | 5.00 | 6.00 | 7.00 |
| Connection pressure-side | mm | 25 | | | | | 38 | |
| Connection pressure-side | | 1" | | | | | 1 1/2" | |
| Connection suctions-side | mm | 38 | | | | | | |
| Connection suctions-side | | 1 1/2" | | | | | | |
| Connections for hoses | cm² | 25/32/38 | | | | | | |
| Connections for hoses | | 1", 1 1/4", 1 1/2" | | | | | | |
| Filter intake surface | | 200 | | | | | 223 | |
| Electronic adjustment | | No | | | Yes | | | |
| Number of nozzles | | - | | | | | | |
| Telescopic nozzle extension | | - | | | | | | |
| Setup type | | Can be setup underwater and dry | | | | | | |